

PRODUCT SPECIFICATION

Product P/N	A620/42/61	Mod. 984A Rev. 06
Description	Expandable Tubing with Double Swivel Elbow and Port	

A620/42/61

Expandable Tubing with Double Swivel Elbow and Port



PRODUCT DESCRIPTION	<p>Inlet/Outlet Connectors of catheter mount:</p> <ul style="list-style-type: none"> - connector ISO 22mm Male/ 22mm Barbed, - collapsible tube with connectors 15.25mm and 22.25mm, - double swivel elbow: Male 22mm / Female 15mm ISO - Angled Male 15mm ISO with luer port. <p>Approximate dimensions of the elbow: 60mm length x 47mm width. Approx. dimensions of catheter mount: 190mm length. Weight: 20g (approx.).</p>
MANUFACTURER NAME	<p>GVS Filter Technology UK NFC House Vickers Industrial Estate Mellishaw Lane, Morecambe Lancashire LA3 3EN - United Kingdom</p> <p>Information Tel. +44 (0) 1524 847600 e-mail: gvsuk@gvs.com</p>
INTENDED USE / APPLICATION	<p>Catheter mounts are used in conjunction with filters in ventilator patient circuits. For performance data, refer to the Instruction For Use for associated filter. The luer port connector is used for monitoring respiratory and/or anaesthesia gases.</p>
CLASS OF THE PRODUCT	<p>Disposable medical device - Class IIa Rule 2 Annex IX 93/42 / EEC Rule 2 Annex VIII MDR 2017/745</p>
MATERIALS	<p>Frame/Housing Polymer: <i>Tube: Transparent clear Polypropylene (PP)</i> <i>Connector: Clear Styrene - Butadiene Copolymer (SBC)</i> <i>Cap & strap: Evoprene G969</i></p> <p>Colour: <i>Transparent Clear and blue cap & strap.</i></p> <p>Regulatory Documentation Required:</p> <ul style="list-style-type: none"> - Biocompatibility according ISO 10993-1 - ROHS - BSE/TSE - DEHP plasticizer Free and latex free - Aging - REACH

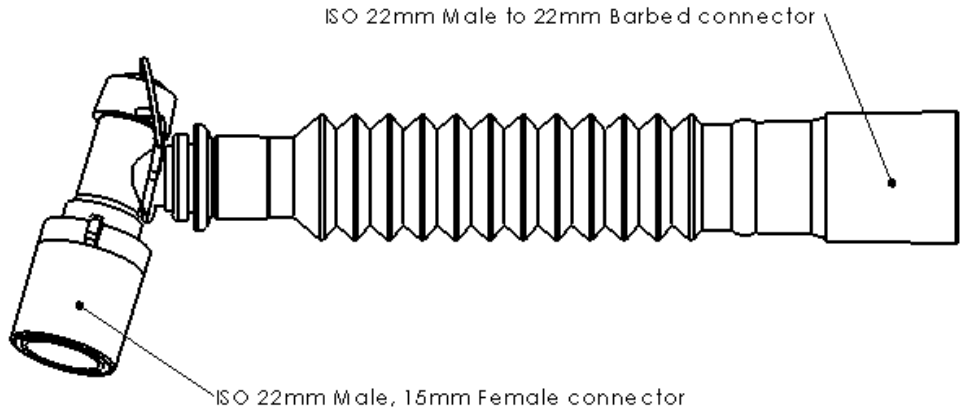
PRODUCT SPECIFICATION

Product P/N	A620/42/61	Mod. 984A
Description	Expandable Tubing with Double Swivel Elbow and Port	Rev. 06

	- Conflict minerals
PRODUCT CHARACTERISTICS	<p>Appearance/Visual As shown on drawing.</p> <p>Physical/Mechanical Approximate dimensions of the elbow: 60mm length x 47mm width. Approx. Dimensions of catheter mount: 190mm length. Weight: 20g (approx.) Interfaces (ex: Input / Output connectors): <ul style="list-style-type: none"> - Connector ISO 22mm Male/ 22mm Barbed; - Collapsible tube with connectors 15.25mm and 22.25mm, 128mm length (when un-collapsed); - Double swivel elbow: Male 22mm / Female 15mm - angled Male 15mm with luer port. </p> <p>Operating temperature Range: N/A Storage temperature Range: 5 °C to 40 °C</p> <p>Biological Biocompatibility to ISO10993 Category – Surface device Contact – Skin Contact Duration - <24hrs</p> <p>Functional Air Flow Rate: N/A Filtration Efficiency: N/A Pressure Drop: N/A Internal Volume: 49ml (approx.) Operating Lifetime: Refer to Instructions for Use. Shelf Lifetime: 5 years from the date of manufacture.</p> <p>Cleanliness Device assembled within Class 8 Cleanroom.</p> <p>Testing N/A</p>
INSTRUCTIONS / WARNINGS	<i>Multi-language IFU available.</i>
PRODUCT SHELF LIFE	<i>5 years from the date of manufacture.</i> <i>Expiration date and date of manufacture are detailed on the product labelling.</i>
STERILIZATION	<i>Sterile version of product available (Ethylene oxide - Max 55°C).</i>
APPLICABLE STANDARDS AND REGULATIONS	<p>Product Certification required:</p> <ul style="list-style-type: none"> - CE mark - FDA <p>Applicable Standards and Technical Regulations: <i>Biological evaluation of Medical Devices - Part 1: Evaluation and Testing - ISO 10993-1.</i></p>

PRODUCT SPECIFICATION

Product P/N	A620/42/61	Mod. 984A
Description	Expandable Tubing with Double Swivel Elbow and Port	Rev. 06

	<p><i>Medical devices- Application of risk management to medical devices - BS EN ISO 14971.</i></p> <p><i>Medical devices – symbols to be used with medical device labels, labelling and information to be supplied - Part1: General requirements - ISO 15223-1.</i></p> <p><i>Sterilization of health care products – Ethylene oxide sterilization – ISO 11135-1.</i></p> <p><i>Sterilization of medical devices – Microbiological Methods – Part 1: Estimation of population of Microorganisms on products – ISO 11737-1.</i></p>
PACKAGING AND LABELING	<p><i>Number of pcs per bag is determined by the sales order.</i></p> <p><i>The first barcode label is applied to the outside of the bags.</i></p> <p><i>The second barcode label is applied onto the outside of the box.</i></p> <p><i>Each bag is labelled with the following traceability information:</i></p> <ul style="list-style-type: none"> ✓ Quantity ✓ Product description ✓ Product Date ✓ Lot Number (OL and 5-digit batch number to trace back to raw materials used) ✓ Operator Code <p><i>Different lots in one box are separately closed and separately labelled.</i></p> <p><i>Bulk products will be packed in double PE bags.</i></p>
CERTIFICATE OF COMPLIANCE	<p><i>With each shipment, GVS UK Customer Service will send the CofC to the Customer, based on the lot numbers and date of manufacture.</i></p> <p><i>Conformity declaration is printed on every invoice and Certificate is according to UNI EN 10204 type 2.1.</i></p> <p><i>The Quality management system is in compliance with ISO 13485.</i></p>
DRAWING	<p><i>The attached drawing is part of this product specification and must not be duplicated or made accessible to a third party without written permission from GVS Filter Technology UK Ltd.</i></p> <div style="text-align: center;">  </div>
ACCEPTABLE QUALITY LEVEL	AQL: 0.65 with sampling Plan: ISO2859.
VISUAL REQUIREMENTS	Visual acceptance requirements apply when inspected under below conditions: Magnification: <i>Unaided eye at a distance of approximately 35-40cm.</i>

PRODUCT SPECIFICATION

Product P/N	A620/42/61	Mod. 984A Rev. 06
Description	Expandable Tubing with Double Swivel Elbow and Port	

	<p>Light type: <i>Lighting level must be reasonable for visual detection.</i> Timings: <i>Maximum inspection period per item is 25 seconds.</i> <i>For detailed defect list, refer to product control plan.</i></p>			
	Acceptance Requirement		AQL	Sampling Plan
	1	Black particle contamination	0.65	ISO 2859 Part 1 General Inspection Level 1
	2	Damaged/broken item	0.65	
	3	Blocked connector/luer	0.65	
	4	Short fill moulding	0.65	
	5	Rough surface or edges	0.65	
	6	Pronounced injection gate	0.65	
	7	Deformation/distortion	0.65	
	8	Crack	0.65	
	9	Oil/grease	0.65	
10	Wrong colour	0.65		
GENERAL SAFETY AND PERFORMANCE REQUIREMENTS	<p>Special characteristic: <i>Product characteristic which can affect safety or compliance with regulations, fit, function, performance or subsequent processing of product.</i></p> <p><i>None identified.</i></p>			

This material specification describes the properties of product above indicated. This document contains general requirements, material description, drawing references, defect specification, biological material requirements.

REVISIONS AND APPROVALS:

DATE	REV.	REASON FOR CHANGE	ISSUED AND CONTROLLED BY: (NAME/FUNCTION/SIGNATURE)	APPROVED BY: (NAME/FUNCTION/SIGNATURE)
18/11/2021	3	Cap & strap raw material added.	Kinga Gawdzik – Engineering Support Technician 	Andrew Pearce – Quality Manager 



PRODUCT SPECIFICATION

Product P/N	A620/42/61	Mod. 984A Rev. 06
Description	Expandable Tubing with Double Swivel Elbow and Port	

CUSTOMER APPROVAL:

We accept this material specification as a part of the agreed terms of delivery.

Company Name:

Approved by:

NAME/FUNCTION

SIGNATURE

DATE

COMPANY STAMP

Please send back this document signed for approval. If we will not receive this specification signed, we consider the first order placed as implicit approval.