

PRODUCT SPECIFICATION

Product P/N	A620/60/61	Mod. 984A Rev. 06
Description	Attachment	

A620/60/61

Attachment



PRODUCT DESCRIPTION	<p>Inlet/Outlet Connectors:</p> <ul style="list-style-type: none"> - connector ISO 22mm Male / 15mm Female - 15mm Male, - connector ISO 22mm Male/ 22mm Barbed, - Collapsible tube with connectors 15.25mm and 22.25mm. <p>Approx. dimensions: 179mm length. Weight: 20g (approx.).</p>
MANUFACTURER NAME	<p>GVS Filter Technology UK NFC House Vickers Industrial Estate Mellishaw Lane, Morecambe Lancashire LA3 3EN - United Kingdom</p> <p>Information Tel. +44 (0) 1524 847600 e-mail: gvsuk@gvs.com</p>
INTENDED USE / APPLICATION	Catheter mounts are used in conjunction with filters in ventilator patient circuits. For performance data, refer to the Instruction For Use for associated filter.
CLASS OF THE PRODUCT	<p>Disposable medical device - Class IIa Rule 2 Annex IX 93/42 / EEC Rule 2 Annex VIII MDR 2017/745</p>
MATERIALS	<p>Frame/Housing Polymer: <i>Tube: Transparent clear Polypropylene (PP)</i> <i>Connector: Clear Styrene - Butadiene Copolymer (SBC)</i> Colour: <i>Transparent Clear.</i></p> <p>Regulatory Documentation Required:</p> <ul style="list-style-type: none"> - Biocompatibility according ISO 10993-1 - ROHS - BSE/TSE - DEHP plasticizer Free and latex free - Aging - REACH - Conflict minerals
PRODUCT CHARACTERISTICS	<p>Appearance/Visual As shown on drawing.</p>

PRODUCT SPECIFICATION

Product P/N	A620/60/61	Mod. 984A Rev. 06
Description	Attachment	

Physical/Mechanical

Approx. dimensions: **179mm length.**

Weight: **20g (approx.)**

Interfaces (ex: Input / Output connectors):

- **Connector ISO 22mm Male / 15mm Female - 15mm Male;**
- **Connector ISO 22mm Male/ 22mm Barbed;**
- **Collapsible tube with connectors 15.25mm and 22.25mm, 128mm length (when un-collapsed).**

Operating temperature Range: **N/A**

Storage temperature Range: **5 °C to 40 °C**

Biological

Biocompatibility to ISO10993

Category – **Surface device**

Contact – **Skin**

Contact Duration - **<24hrs**

Functional

Air Flow Rate: **N/A**

Filtration Efficiency: **N/A**

Pressure Drop: **N/A**

Internal Volume: **49ml (approx.)**

Operating Lifetime: **Refer to Instructions for Use.**

Shelf Lifetime: **5 years from the date of manufacture.**

Cleanliness

Device assembled within Class 8 Cleanroom.

Testing

N/A

INSTRUCTIONS / WARNINGS

Multi-language IFU available.

PRODUCT SHELF LIFE

5 years from the date of manufacture.

Expiration date and date of manufacture are detailed on the product labelling.

STERILIZATION

Sterile version of product available (Ethylene oxide - Max 55°C).

APPLICABLE STANDARDS AND REGULATIONS

Product Certification required:

- CE mark
- FDA

Applicable Standards and Technical Regulations:

Biological evaluation of Medical Devices - Part 1: Evaluation and Testing - ISO 10993-1.

Medical devices- Application of risk management to medical devices - BS EN ISO 14971.

Medical devices – symbols to be used with medical device labels, labelling and information to be supplied - Part1: General requirements - ISO 15223-1.

PRODUCT SPECIFICATION

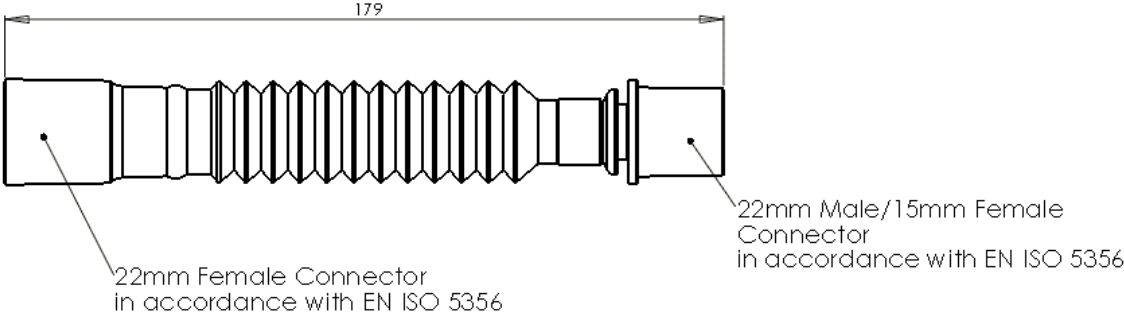
Product P/N	A620/60/61	Mod. 984A Rev. 06
Description	Attachment	

Sterilization of health care products – Ethylene oxide sterilization – ISO 11135-1.

Sterilization of medical devices – Microbiological Methods – Part 1: Estimation of population of Microorganisms on products – ISO 11737-1.

PACKAGING AND LABELING	<p><i>Number of pcs per bag is determined by the sales order.</i></p> <p><i>The first barcode label is applied to the outside of the bags.</i></p> <p><i>The second barcode label is applied onto the outside of the box.</i></p> <p><i>Each bag is labelled with the following traceability information:</i></p> <ul style="list-style-type: none"> ✓ Quantity ✓ Product description ✓ Product Date ✓ Lot Number (OL and 5-digit batch number to trace back to raw materials used) ✓ Operator Code <p><i>Different lots in one box are separately closed and separately labelled.</i></p> <p><i>Bulk products will be packed in double PE bags.</i></p>
-------------------------------	---

CERTIFICATE OF COMPLIANCE	<p><i>With each shipment, GVS UK Customer Service will send the CofC to the Customer, based on the lot numbers and date of manufacture.</i></p> <p><i>Conformity declaration is printed on every invoice and Certificate is according to UNI EN 10204 type 2.1.</i></p> <p><i>The Quality management system is in compliance with ISO 13485.</i></p>
----------------------------------	--

DRAWING	<p><i>The attached drawing is part of this product specification and must not be duplicated or made accessible to a third party without written permission from GVS Filter Technology UK Ltd.</i></p> <div style="border: 1px solid black; padding: 5px; text-align: center; margin: 10px auto; width: fit-content;"> <p>Approximate dimensions for reference only</p> </div>  <p style="text-align: center;">179</p> <p style="text-align: center;">22mm Female Connector in accordance with EN ISO 5356</p> <p style="text-align: right;">22mm Male/15mm Female Connector in accordance with EN ISO 5356</p>
----------------	--

ACCEPTABLE QUALITY LEVEL	AQL: 0.65 with sampling Plan: ISO2859.
---------------------------------	--

VISUAL REQUIREMENTS	<p>Visual acceptance requirements apply when inspected under below conditions:</p> <p><i>Magnification: Unaided eye at a distance of approximately 35-40cm.</i></p> <p><i>Light type: Lighting level must be reasonable for visual detection.</i></p> <p><i>Timings: Maximum inspection period per item is 25 seconds.</i></p> <p><i>For detailed defect list, refer to product control plan.</i></p>
----------------------------	--

PRODUCT SPECIFICATION

Product P/N	A620/60/61	Mod. 984A Rev. 06
Description	Attachment	

		Acceptance Requirement	AQL	Sampling Plan
1	Black particle contamination		0.65	ISO 2859 Part 1 General Inspection Level 1
2	Damaged/broken item		0.65	
3	Blocked connector/luer		0.65	
4	Short fill moulding		0.65	
5	Rough surface or edges		0.65	
6	Pronounced injection gate		0.65	
7	Deformation/distortion		0.65	
8	Crack		0.65	
9	Oil/grease		0.65	
10	Wrong colour		0.65	

GENERAL SAFETY AND PERFORMANCE REQUIREMENTS	<p>Special characteristic: <i>Product characteristic which can affect safety or compliance with regulations, fit, function, performance or subsequent processing of product.</i></p> <p><i>None identified.</i></p>
--	--

This material specification describes the properties of product above indicated. This document contains general requirements, material description, drawing references, defect specification, biological material requirements.

REVISIONS AND APPROVALS:

DATE	REV.	REASON FOR CHANGE	ISSUED AND CONTROLLED BY: (NAME/FUNCTION/SIGNATURE)	APPROVED BY: (NAME/FUNCTION/SIGNATURE)
02/08/2021	2	Contact and sterile sections amended.	Kinga Gawdzik – Engineering Support Technician 	Andrew Pearce – Quality Manager 



PRODUCT SPECIFICATION

Product P/N	A620/60/61	Mod. 984A Rev. 06
Description	Attachment	

CUSTOMER APPROVAL:

We accept this material specification as a part of the agreed terms of delivery.

Company Name:

Approved by: _____

NAME/FUNCTION

SIGNATURE

DATE

COMPANY STAMP

Please send back this document signed for approval. If we will not receive this specification signed, we consider the first order placed as implicit approval.