



Product PNGIS003A01S GIS003B01S GIS003C01S GIS003D01S
GIS004A01S GIS004B01S GIS004C01S GIS004D01SMod. 984e-extDescriptionHI-FLO IV Set Pediatric 0.2/1.2 μm Easydrop/Eurodrop®
single/double scaleRev. 07

HI-FLO IV Set Pediatric with 0.2/1.2 µm Filter, Regulator and Roller

PRODUCT DESCRIPTION	Infusion set for infusion for intravascular applications. The device is sterile and is for gravity feed infusion only. The set has a vented IV drip chamber (20 drops/ml) and a male luer lock outlet with cap, compliant with ISO 80369-7. The set is provided with a vented Speedflow® Pediatric filter, with an hydrophilic PES membrane with 0.2/1.2 µm pore size for particles retention and a hydrophobic PTFE membrane with 0,03 µm pore size. The set also includes a roller and a flow regulator Easydrop/Eurodrop® single/double scale, to approximately regulate the flow rate. The set is provided with a y-injection site, for administration of additional drugs by means of a syringe using the same infusion line. The approximate total length of the set is 2171 mm. The set includes the following components: Drip Chamber (20 drops/ml); Roller; Flow regulator Easydrop®/Eurodrop® single/double scale; Y-Injection point; Speedflow® Pediatric 0.2/1.2 µm IV Filter; Clamp; Male luer lock outlet with cap.		
CONFIGURATIONS	GIS003A01S GIS003B01S O.2 µm with Easydrop® single scale GIS003C01S O.2 µm with Easydrop® double scale GIS003D01S O.2 µm with Eurodrop® single scale GIS003D01S O.2 µm with Eurodrop® double scale GIS004A01S 1.2 µm with Easydrop® single scale GIS004B01S 1.2 µm with Easydrop® double scale GIS004C01S GIS004D01S 1.2 µm with Eurodrop® single scale GIS004D01S 1.2 µm with Eurodrop® double scale		
MANUFACTURER NAME	GVS S.p.A. Via Roma, 50 – 40069 Zola Predosa (BO) – Italy Phone: +39.051.6176311 – Fax: +39.051.6176200 email: gvs@gvs.it – website: www.gvs.com		
INTENDED USE / APPLICATION	Infusion of Drugs (including chemotherapy), Anesthetics, Nutritional Solutions and Saline Solutions for intravascular applications. The set can be connected via Luer Locks to all commercially available infusion administration sets compliant with ISO 80369-7. The set is for gravity feed infusion only. The set with 0.2 µm filter is intended specifically to eliminate air bubbles and to retain particles and bacteria, while the set with 1.2 µm filter is intended specifically to eliminate air bubbles and to retain fungi and microorganisms. The set is a single-use device that can be used applications that last: Devices with 0.2 µm filter: up to 96 hours; Devices with 1.2 µm filter: up to 24 hours. The set has to be disposed after each therapy. Sets with 0.2 µm filter cannot be used for infusion of hyper alimentation liquids, lipids, blood and/or blood derivatives. Sets with 1.2 µm filter cannot be used for infusion of blood and/or blood derivatives. The device should only be supervised and used by qualified healthcare personnel.		
CLASS OF THE PRODUCT	Class IIa – sterile – single use Rule 2 and 3 Annex VIII 2017/472/UE		





Product PN GIS003A01S GIS003B01S GIS003C01S GIS003D01S GIS004A01S GIS004B01S GIS004C01S GIS004D01S

Mod. 984e-ext

Description HI-FLO IV Set Pediatric 0.2/1.2 μm Easydrop/Eurodrop®

single/double scale

Rev. 07

	igle/double sca			
EMDN	A03010102 INFU	INFUSION CONTROLLERS WITH FILTER (ALSO TRANSFUSION CONTROLLERS)		
MATERIALS	Filter housing: MBS Tubes: PVC Flow Regulator: SEB Roller: HDF Drip Chamber: ABS Y-injection: SEB Clamp: PP / Luer Lock: MAE Caps: HDF Regulatory Compliance Biocompatibility Rohs directive DEHP plasticiz Latex free Reach 1907/20	atibility according to ISO 10993-1 ective 2011/65/EU asticizer Free		
PRODUCT CHARACTERISTICS	 Reg. 1272/2008/CE (classification, la Physical/Mechanical: 		2171 mm 32.0 ml 46 g Male luer lock outlet with cap compliant with ISO 803 From 5 °C to 40 °C From 0 °C to 40 °C Compliant with ISO 10993-1 gravity 0.2 µm up to 96 hours 1.2 µm up to 24 hours Speedflow Pediatric 0.2/1.2 µm vented 0.2/1.2 µm < 1.3 ml hydrophilic PES membrane and hydrophobic PTFE n Easydrop®/Eurodrop® single/double scale Yes — 20 drops / ml Yes Yes Yes PVC tube — inner Ø 3.0 mm / outer Ø 4.1 mm	
PRODUCT SHELF LIFE	Tubing: 5 years		r ve tube – Illiel & 3.0 Illiii / Outel & 4.1 Illiii	
STERILIZATION	Sterile:		Yes – EtO	
	Suitable for Sterilization	on/Re-sterilization:	No	
APPLICABLE STANDARDS AND REGULATIONS	Product Certification: CE mark Applicable Standards and Technical Regulations: EN 556-1 Sterilization of medical devices — Requirements for medical devices to be designated "STERILE — Part 1: Requirements for terminally sterilized medical devices EN ISO 8536-4 Infusion equipment for medical use — Part 4: Infusion sets for single use, gravity feed Infusion equipment for medical use — Part 11: Infusion filters for single use with pressure infusion equipment			ty feed





Product PN GIS003A01S GIS003B01S GIS003C01S GIS003D01S GIS004A01S GIS004B01S GIS004C01S GIS004D01S Mod. 984e-ext

Description HI-FLO IV Set Pediatric 0.2/1.2 μm Easydrop/Eurodrop® single/double scale

	EN ISO 8536-13	Infusion equipment for medical use — Part 13: Graduated flow regulators for single use with fluid contact			
	EN ISO 8536-14	Infusion equipment for medical use — Part 14: Clamps and flow regulators for transfusion and infusion equipment without fluid contact			
	EN ISO 10993-1	Biological evaluation of medical devices — Part 1: Evaluation and testing within a risk management process			
	EN ISO 10993-4	Biological evaluation of medical devices — Part 4: Selection of tests for interactions with blood			
	EN ISO 10993-5	Biological evaluation of medical devices — Part 5: Tests for in vitro cytotoxicity			
	EN ISO 10993-7	Biological evaluation of medical devices — Part 7: Ethylene oxide sterilization residuals			
	EN ISO 10993-10	Biological evaluation of medical devices — Part 10: Tests for irritation and skin sensitization			
	EN ISO 10993-11	Biological evaluation of medical devices — Part 11: Tests for systemic toxicity			
	EN ISO 10993-18	Biological evaluation of medical devices — Part 18: Chemical characterization of materials			
	EN ISO 10993-23	Biological evaluation of medical devices — Part 23: Tests for irritation			
	EN ISO 11135	Sterilization of health-care products — Ethylene oxide — Requirements for the development, validation and routine control of a sterilization process for medical devices			
	EN ISO 11607-1	Packaging for terminally sterilized medical devices — Part 1: Requirements for materials, sterile barrier systems and packaging systems			
	EN ISO 11607-2	Packaging for terminally sterilized medical devices — Part 2: Validation requirements for forming, sealing and assembly processes			
	EN ISO 13485	Medical devices — Quality management systems — Requirements for regulatory purposes			
	EN ISO 14971	Medical devices — Application of risk management to medical devices			
	EN ISO 15223-1	23-1 Medical devices — Symbols to be used with medical device labels, labelling and information to be supplied — Part 1: General requirements			
	EN ISO 20417	EN ISO 20417 Medical devices — Information to be supplied by the manufacturer			
	IEC 62366-1	Medical devices — Part 1: Application of usability engineering to medical devices			
	EN ISO 80369-1	Small-bore connectors for liquids and gases in healthcare applications — Part 1: General requirements			
	EN ISO 80369-7	Small-bore connectors for liquids and gases in healthcare applications — Part 7: Connectors for intravascular or hypodermic applications			
	EN ISO 80369-20	Small-bore connectors for liquids and gases in healthcare applications — Part 20: Common test methods			
INSTRUCTIONS FOR USE	Available languages English / Italiar	s: n / German / French / Spanish			
PACKAGING	Primary Packaging	1:			
	Devices are individually packed and label in medical paper bags. Bag Size: 150 X 250 mm				
	Secondary Packaging: Bags are placed inside a microperforated sack.				
	Tertiary Packaging	:			
	,	Carton Box.			
		Box Size: 60 x 40 x 20 cm			
		Box Weight: 4.5 Kg Devices per box: 70			
CERTIFICATIONS	ISO 9001:2015 ISO 13485:2016				
CERTIFICATIONS		7/745/UE)			






Product PN GIS003A01S GIS003B01S GIS003C01S GIS003D01S GIS004A01S GIS004B01S GIS004C01S GIS004D01S

Mod. 984e-ext

Description HI-FLO IV Set Pediatric 0.2/1.2 μm Easydrop/Eurodrop® single/double scale

Rev. 07

DRAWING

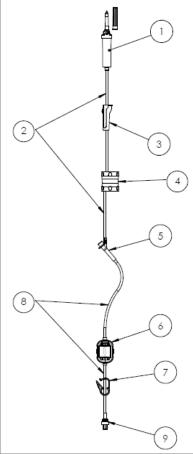

ID	Description		
1	Drip Chamber 20 drops/ml		
2	Tube 75 cm – inner Ø 3.0 mm / outer Ø 4.1 mm		
3	Roller		
4	'A' model: Flow Regulator Easydrop® single scale 'B' model: Flow Regulator Easydrop® double scale 'C' model: Flow Regulator Eurodrop® single scale "D model: Flow Regulator Eurodrop® double scale		
5	Y-Injection site		
6	'1' model: Speedflow Pediatric 0.2 μm IV filter '2' model: Speedflow Pediatric 1.2 μm IV filter		
7	Clamp		
8	Tube 15 cm – inner Ø 3.0 mm / outer Ø 4.1 mm		
9	Male Luer Lock with cap		

REVISIONS AND APPROVALS:

DATE	REV.	REASON FOR CHANGE		VERIFIED BY: (name/function/signature)	APPROVED BY: (name/function/signature)
26/02/2023	00	First issue	Barbara Palmieri RA Specialist Bouloudolio	Barbara Finessi QA Manage	Luca Zanini VP Healthcare and Lifesience